

Electric Butterfly Valves

PN16/235PSI/Class125

220V/380V · Multi-stage Aluminum Alloy Housing

Asynchronous Motor · Precision Gear


Moisture-proof Heating Resistor · Epoxy Resin Coating

90° Rotation · IP67 Protection

Wafer Style, Flange Dimension EN1092-2, ANSI B16.1 Class 125

Sealing Performance	
EPDM	-20°C- 120°C
NBR	-10°C- 80°C
VITON	-20°C- 150°C

Hydraulic Pressure Test	
Body	2.4Mpa/24Bar
Seat	1.76Mpa/17.6Bar





HB950/S-EH/ RH

2" - 12"

Materials List

No	Part	Specification	BS EN	ASTM
1	Body	Ductile Iron	BSEN 1563	A536 65-45-12
2	Bottom Stem	Stainless Steel	BSEN 10088-1	A582 420
3	O-Ring	NBR	NBR	NBR
4	Seat	EPDM NBR VITON	EPDM NBR VITON	EPDM NBR VITON
5	Disc	Ductile Iron Stainless Steel Aluminum Bronze	BSEN 1563 BS970 304S15 1400AB2	A536 65-45-12 CF8 B148 Ay 954
6	Upper Stem	Stainless Steel	BSEN 10088-1	A582 420
7	Bushing	Composite Material	PTFE&Bronze	PTFE&Bronze
8	Screw	Steel	BSEN 10087	A307
9	Electric Actuators	Other		

* Figure number - ET for ON/OFF control, - RM for regulating control.
Please specify when ordering.

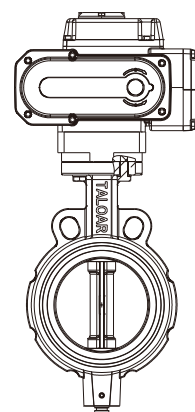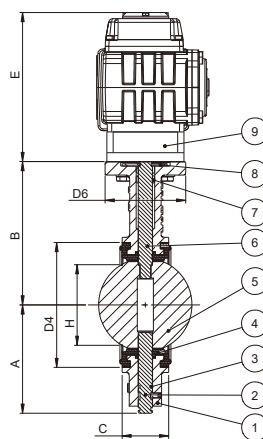

Dimensions-Weights

mm	50	65	80	100	125	150	200	250	300
In	2	2½	3	4	5	6	8	10	12
A	78	90	99	120	134	142	178	203	240
B	120	137	145	160	175	189	220	250	290
C	43	46	46	52	56	56	62	68	78
E	115	115	115	115	120	120	142	142	142
H	23.9	39.5	60.3	87.3	106.5	142.3	193.2	242.2	290.2
D4	83	96	138	139	167	194	248	300	352
h	9	9	9	11	14	14	17	22	24
D6	90	90	90	90	90	90	125	125	125
D7	70	70	70	70	70	70	102	102	102
D9	55	55	55	55	55	55	70	70	70
n-φd	4-10	4-10	4-10	4-10	4-10	4-10	4-12	4-12	4-12
ISO5211	F07	F07	F07	F07	F07	F07	F10	F10	F10
Weight	Lbs	10.6	12.1	13.0	21.4	24.9	39.2	52.3	63.7
	Kg	4.8	5.5	5.9	9.7	11.3	17.8	23.7	28.9

Note: Steam services are not recommended.